


## LMF/K/H型

플랜지형

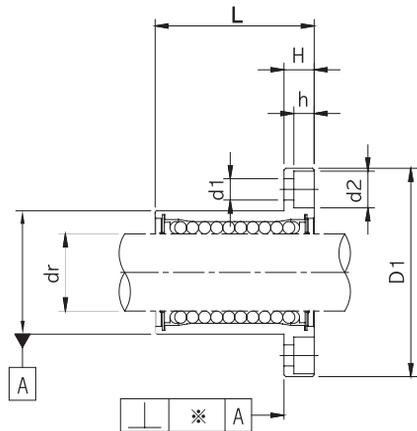


公稱型號			球 列 摺	重量* (g)	反徑方向間 隙允許值 ( $\mu\text{m}$ )	基本額定負荷		內接圓徑	
圓形	角型	娥圓形				動 C(N)	靜 Co(N)	dr (mm)	允許公差 ( $\mu\text{m}$ )
LMF 6UU	LMK 6UU	-	4	26.5	- 5	200	260	6	0 - 9
LMF 8UU	LMK 8UU	-	4	40.0	- 5	260	400	8	
LMF10UU	LMK10UU	LMH10UU	4	78.0	- 5	370	540	10	
LMF12UU	LMK12UU	LMH12UU	4	76.0	- 5	410	590	12	
LMF13UU	LMK13UU	LMH13UU	4	94.0	- 7	500	770	13	
LMF16UU	LMK16UU	LMH16UU	5	134.0	- 7	770	1170	16	
LMF20UU	LMK20UU	LMH20UU	5	180.0	- 9	860	1370	20	0 -10
LMF25UU	LMK25UU	LMH25UU	6	340.0	- 9	980	1560	25	
LMF30UU	LMK30UU	LMH30UU	6	460.0	- 9	1560	2740	30	
LMF35UU	LMK35UU	-	6	795.0	-13	1660	3130	35	0 -12
LMF40UU	LMK40UU	-	6	1054.0	-13	2150	4010	40	
LMF50UU	LMK50UU	-	6	2200.0	-13	3820	7930	50	
LMF60UU	LMK60UU	-	6	2960.0	-16	4700	9990	60	0 -15

注意 也可製造端面處理鍍金及冷電鍍處理

※ 圓筒型法蘭標準

1N  $\approx$  0.102kgf

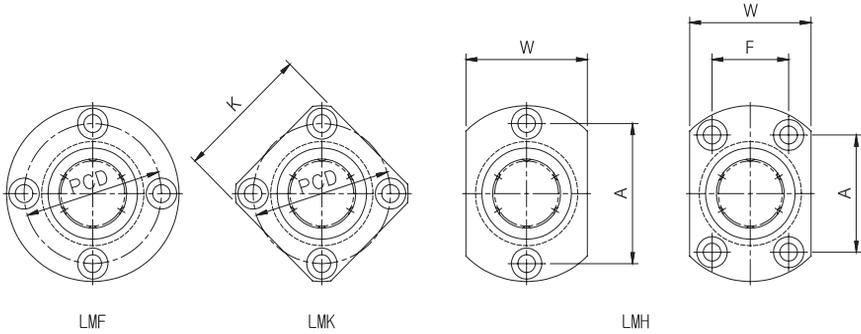

單位: mm

主要尺寸(mm)														公稱型號	
外徑(D)		長度(L)		D <sub>1</sub>		H	PCD	K	W	A	F	直角度 × (μm)	d <sub>1</sub> ×d <sub>2</sub> ×h		
(mm)	允許公差 (μm)	(mm)	允許公差 (mm)	(mm)	允許公差 (mm)										
12	0	19	-0.2	28	-0.2	5	20	22	-	-	-	12	3,4×6,5×3,3	LMF/K/H6UU	
15	-11	24		32		5	24	25	-	-	-	12	3,4×6,5×3,3	LMF/K/H8UU	
19	-13	29		40		6	29	30	25	29	-	12	4,5×8×4,4	LMF/K/H10UU	
21		0		30		42	6	32	32	27	32	-	12	4,5×8×4,4	LMF/K/H12UU
23		-13		32		43	6	33	34	29	33	-	12	4,5×8×4,4	LMF/K/H13UU
28	-16	37		48		6	38	37	34	31	22	12	4,5×8×4,4	LMF/K/H16UU	
32		42	54	8	43	42	38	36	24	15	5,5×9,5×5,4	LMF/K/H20UU			
40		0	59	62	8	51	50	46	40	32	15	5,5×9,5×5,4	LMF/K/H25UU		
45		-16	64	74	10	60	58	51	49	35	15	6,6×11×6,5	LMF/K/H30UU		
52	-19	70	-0.3	82	-0.3	10	67	64	-	-	-	20	6,6×11×6,5	LMF/K/H35UU	
60		0		80		96	13	78	75	-	-	-	20	9×14×8,6	LMF/K/H40UU
80		-19		100		116	13	98	92	-	-	-	20	9×14×8,6	LMF/K/H50UU
90	-22	110		134		18	112	106	-	-	-	25	11×17,5×10,8	LMF/K/H60UU	

1N ≒ 0.102kgf